


Outward opening Durham latch Assembly Instructions

- Using the template provided mark out the hole positions and drill holes.
- Fit Latch Handle (**In Closed Position**) to door and position the Plastic Cup (**Tab downwards**); using fixing screws; tighten down (**Take care not to over-tighten**).
- Fit brass drive. Fit Signal with **RED** section upwards.
- Align the bottom of the Face Plate to the Cup Tab.
- Carefully but firmly locate on top rim of Cup lip.
- Ensure the Face Plate is positively and securely located. (Do not use excessive force)
- Check for free movement of Latch.
- Ensure the Signal indicates correctly – **WHITE 'OPEN' / RED 'CLOSED'**
- To remove Face Plate depress the Cup Tab using a small screwdriver and remove with care.

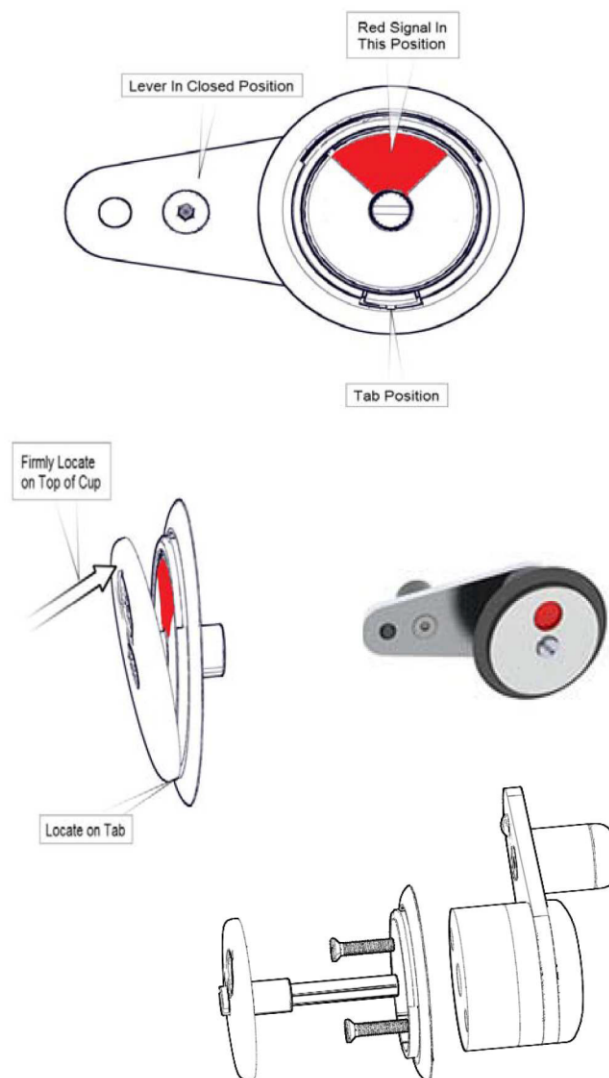

NOTE:

FOR INWARD OPENING DOOR FIT TO PILASTER.

FOR OUTWARD OPENING DOOR FIT TO DOOR.

